

DJ Controller

DDJ-SB3



Firmware Update Guide

Read Before Use (Important)

- Extract the downloaded update file for updating.
- If you should have any questions, please contact the Pioneer Customer Support Center.

Reference Information

This updater has been verified to operate on the operating systems below;

- Windows® 10/ Windows® 8.1/ Windows® 7
- macOS High Sierra 10.13
- macOS Sierra 10.12
- OS X 10.11

Updating Procedures


Note: *Disconnect all the cables from the unit. And close all applications on your computer before running this updating procedure.*

- 1) Connect your computer to DDJ-SB3 via the USB cable included with the product.
- 2) Double-click the update file. Once the update program is launched, select the language to be used and click [OK].




After selecting the language, the CH2 red level indicator of DDJ-SB3 blinks. (This means DDJ-SB3 is in the Update mode.)

- 3) When the version information confirmation screen appears, check the contents, then click [Start]. If the current version and update version are the same, there is no need to update. Click [Close].

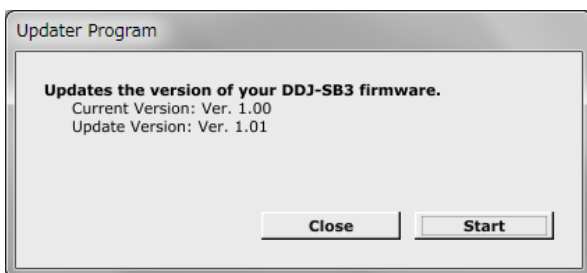

- 4) Updating starts. Do not disconnect the USB cable during updating. Approximately one minute is required for updating.

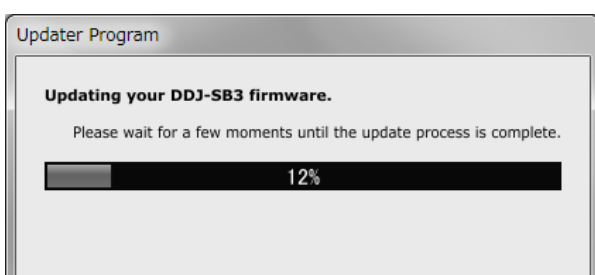

- 5) When the firmware update process is complete, click the [OK] button. After this process is complete, DDJ-SB3 reboots automatically.

Note: *Please note that if you fail to update, once disconnect the USB cable and start from Step 1) of the above Updating Procedures.*

How to check the Firmware Version


Windows

[For Windows 10 and Windows 8.1]

- (1) Right-click the Start button and select [Device Manager] from the displayed menu.
- (2) Open Properties of [Sound, video and game controllers] → [DDJ-SB3 Properties] and select the Details tab.
- (3) Select [Hardware Ids] from the [Property] drop-down menu.
- (4) The x part of "USB¥VID_2B73&PID_0019&REV_xxxx" displayed in [Value] is the firmware version. (For example, USB¥VID_2B73&PID_0019&REV_0101 means the firmware version is 1.01.)

[For Windows 7]


- (1) Open Properties of [Start Menu] → [Control Panel] → [Device Manager] → [Sound, video and game controllers] → [DDJ-SB3 Properties] and select the Details tab.
- (2) Select [Hardware Ids] from the [Property] drop-down menu.
- (3) The x part of "USB¥VID_2B73&PID_0019&REV_xxxx" displayed in [Value] is the firmware version. (For example, USB¥VID_2B73&PID_0019&REV_0101 means the firmware version is 1.01.)

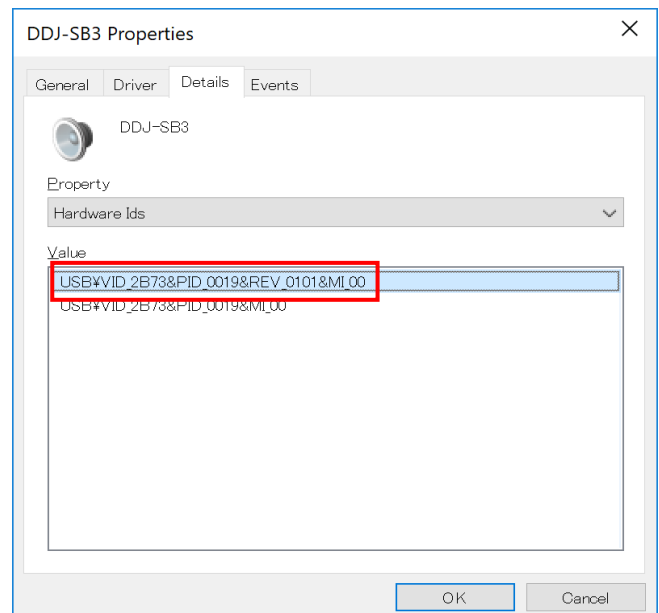

=====

macOS, OS X

Open Apple icon → [About This Mac] → [System Report] → [Hardware] → [USB] and check the version displayed for DDJ-SB3.

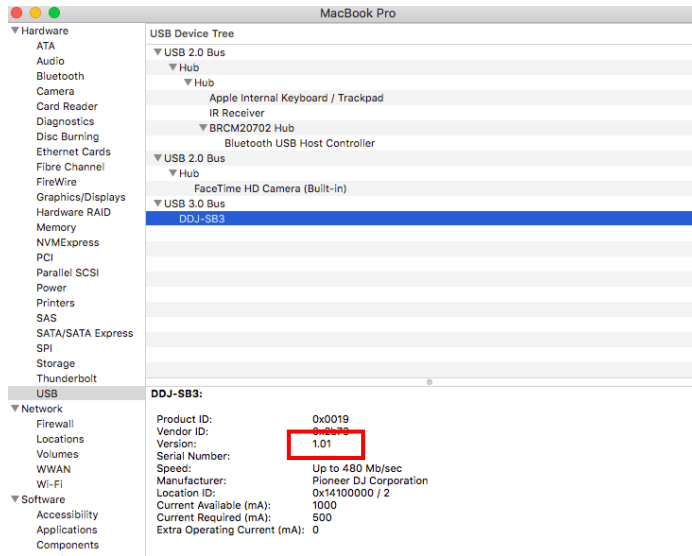

About Trademarks and Registered Trademarks

- “Pioneer DJ” is a trademark of PIONEER CORPORATION, and is used under license.
- Windows is a registered trademark of Microsoft Corporation in the United States and other countries.
- macOS, OS X are trademarks of Apple Inc., registered in the U.S. and other countries.
- The names of companies, product names and technology names mentioned herein are the trademarks of their respective owners.

© 2018 Pioneer DJ Corporation.
All rights reserved.
PIONEER DJ CORPORATION
6F, Yokohama i-Mark Place, 4-4-5 Minatomirai, Nishi-ku, Yokohama,
Kanagawa 220-0012 Japan