

DJ Controller

# DDJ-FLX4



## Firmware Update Guide

## Update the firmware using your computer

If you're using rekordbox for iOS/Android, you can update the firmware from your mobile device.

Go to "**Update the firmware using your mobile device**".


### A. Checking the current firmware version of the DDJ-FLX4

1. Connect your DDJ-FLX4 to your PC/Mac using the USB cable.


2. Check the Firmware Version.

- For Mac :

Click Apple menu > [About This Mac] > [System Report] > [Hardware] > [USB] and check the version displayed for the DDJ-FLX4.

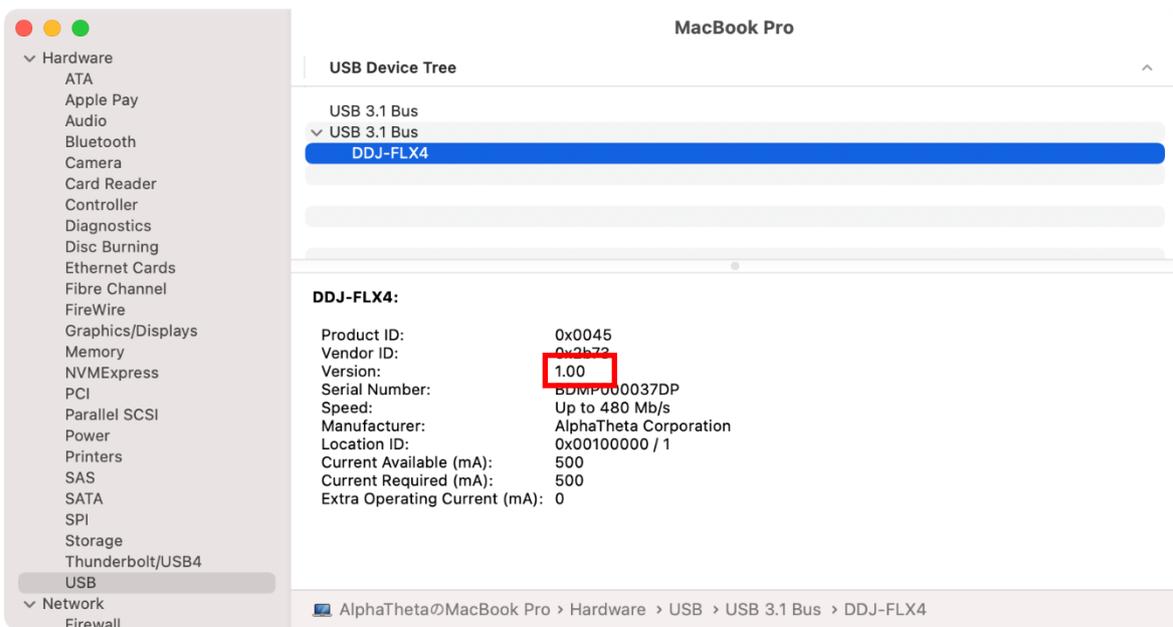

- For Windows :
  - 1) Right-click the Start button and select [Device Manager] from the displayed menu.
  - 2) Open [Sound, video and game controllers] > [DDJ-FLX4 Properties] and select [Details] tab.
  - 3) Select [Hardware Ids] from the [Property] drop-down menu.
  - 4) The x part of “USB\VID\_2B73&PID\_0045&REV\_xxxx” displayed is the firmware version.  
(For example, USB\VID\_2B73&PID\_0045&REV\_0100 means the firmware version is 1.00.)

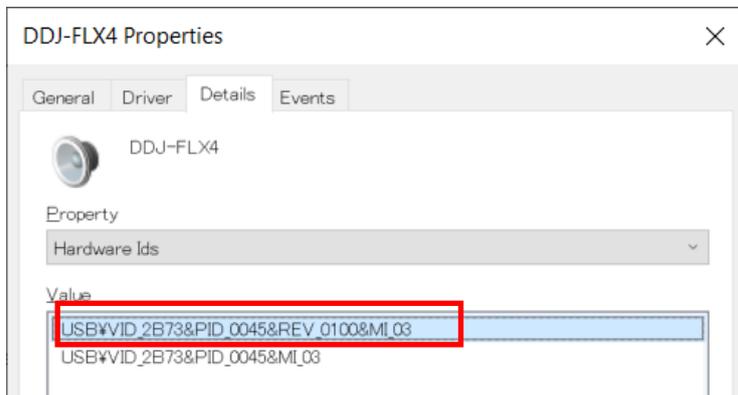

## B. Checking the downloaded file

### 1. Unzip the downloaded file.

- For Mac :

Double-click [DDJ-FLX4\_vxxx\_MAC.dmg] to mount it.
- For Windows :

Save the downloaded file [DDJ-FLX4\_vxxx\_WIN.zip] to a folder in any location such as desktop and unzip it.

### 2. Check the unzipped file.

- For Mac :


Check the following file is included in the extracted [DDJ-FLX4\_vxxx\_MAC] folder.  
[DDJ-FLX4\_vxxx.app]
  - For Windows :

Check the following file is included in the extracted [DDJ-FLX6\_vxxx\_MAC] folder.  
[DDJFLX4UpdateProgram.exe]  
[ddjflx4hid.dll]  
[ddjflx4\_vxxx.bin]
- ✓ **xxx** is the new version number of the firmware.
- ✓ Depending on your computer settings, the extension such as .exe or .app may not be displayed.

## C. Preparing for the update on the DDJ-FLX4

### 1. Connect the DDJ-FLX4 to your PC/Mac.

Connect the DDJ-FLX4 to your PC/Mac using a USB cable.

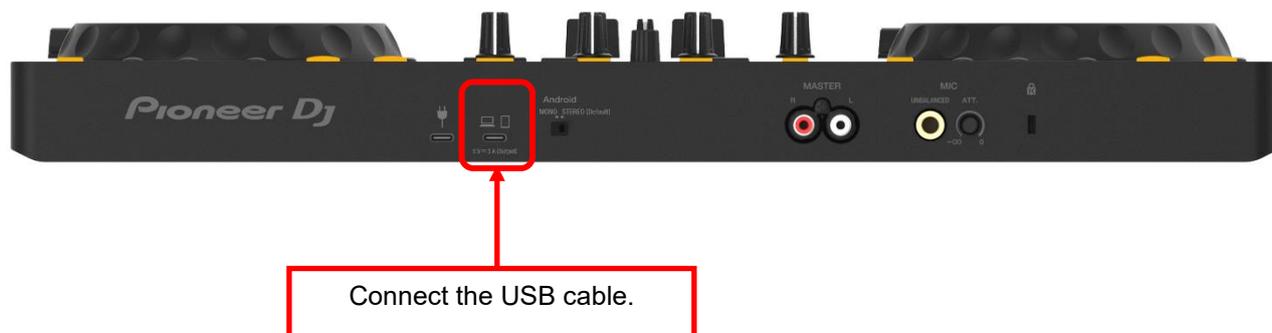

## D. Updating the firmware through your PC/Mac


Before updating, close all the applications running on your PC/Mac.

### 1. Open the updater program.

- For Mac :  
Double click [DDJ-FLX4\_vxxx.app].
- For Windows :  
Double click [DDJFLX4UpdateProgram.exe].

### 2. Select a language.

Select a language you want to use and click "OK".

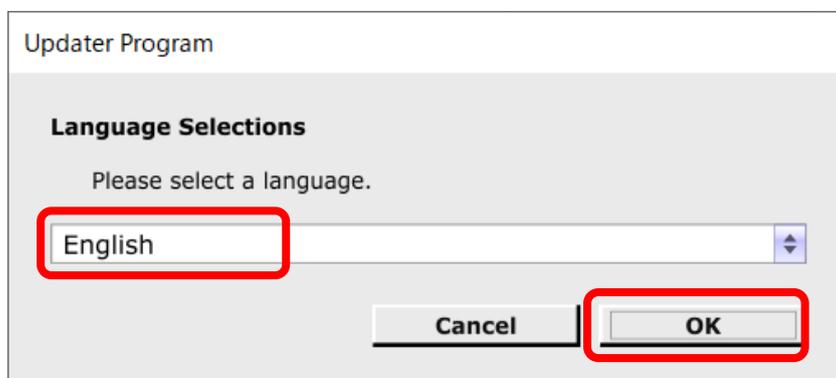


### 3. Check the firmware version.

Ensure that the version is **x.xx**. Click “Start”. (The figure below is an example.)

**Do not** disconnect the USB cable during the update.


Please use an **AC adaptor** to power your laptop during update.

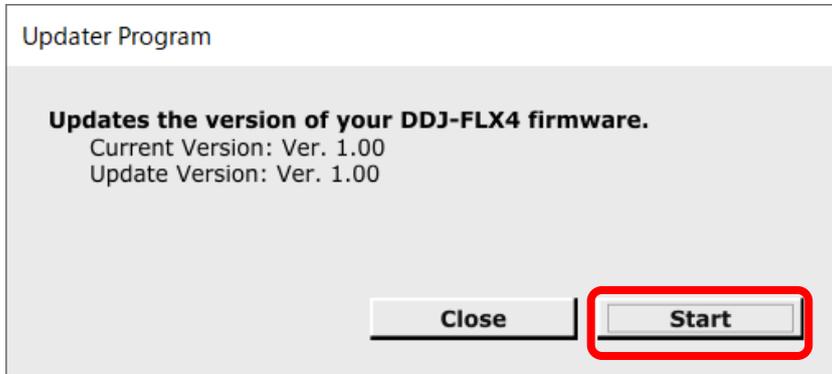

### 4. During the update.

Please wait until the progress bar reaches to the right end.

While the update is in progress, the level indicator of DDJ-FLX4 blinks.

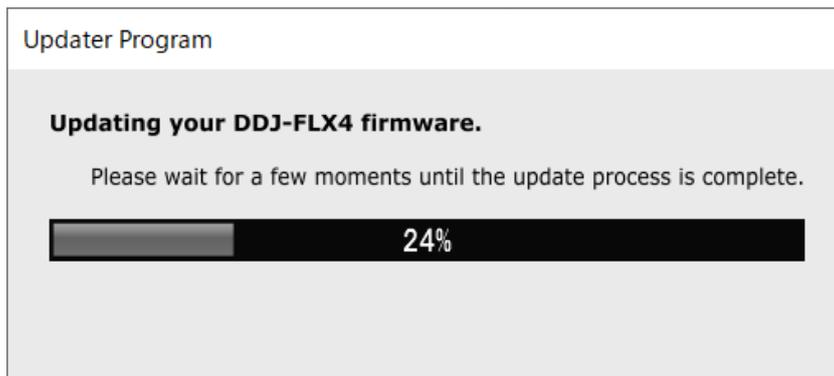

### 5. The update process is complete.

If the message below is displayed, click “OK”.



## 6. Restart the DDJ-FLX4.


After the update is complete, the DDJ-FLX4 will automatically restart.

## E. Checking the firmware version

Check the firmware version of the DDJ-FLX4 as described in “**A. Checking the current firmware version of DDJ-FLX4**”. When you find the version you wanted, the firmware update is successfully complete.

## Tips : When you fail to update the firmware

If you fail to update, click “Close”, disconnect the USB cable, and start from “**C. Preparing for the update on the DDJ-FLX4**”.

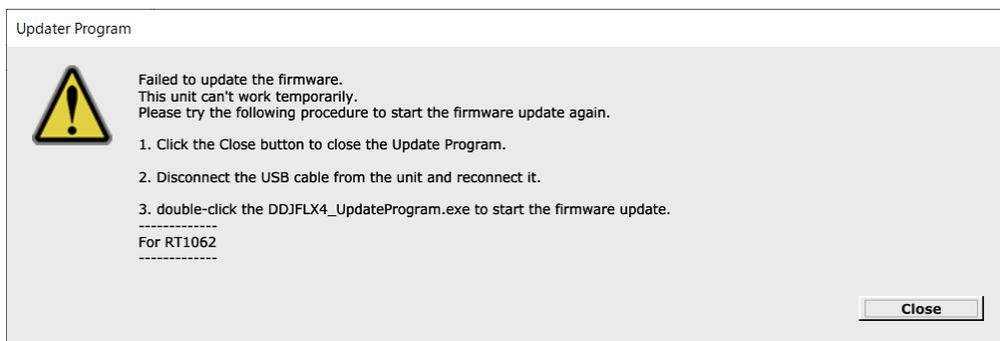


## Update the firmware using your mobile device

- ✓ To update the firmware from a mobile device, you'll need rekordbox for iOS/Android.
- ✓ You'll need an internet connection to download the firmware.
- ✓ The battery level of the mobile device should be at least 50%.
- ✓ Firmware updates are supported only through USB connection.

### A. Checking the current firmware version of the DDJ-FLX4

1. Connect a USB power adapter, etc. to the USB port (for power supply) and turn on the DDJ-FLX4.
2. Connect your mobile device to the USB port (for device connection) via USB.
3. Check the firmware version.
  - For iOS :  
Tap to select [Settings] > [General] > [About] > [DDJ-FLX4]\*.

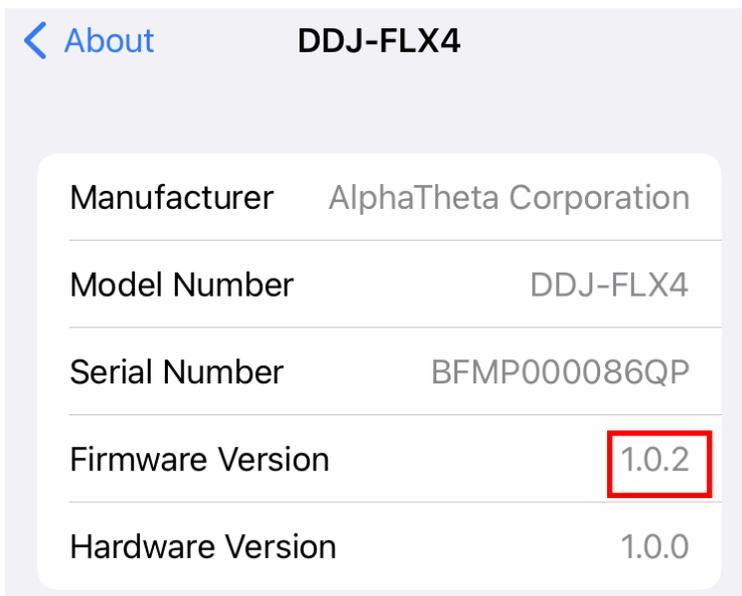

\* In some cases, [DJ CONTROLLER] will be displayed.

- For Android :  
There is no way to check the version of the DDJ-FLX4.  
Go to "**B. Preparing for the update on the DDJ-FLX4**".



## C. Updating the firmware through rekordbox for iOS/Android

### 1. Start rekordbox for iOS/Android.


Tap the rekordbox icon.

### 2. Go to the Settings screen.


Tap the rekordbox icon in the center of the screen.



Tap the Settings icon.

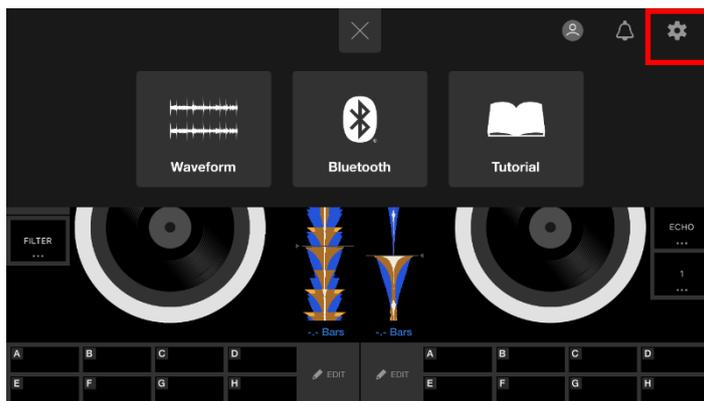


Tap the [DDJ-FLX4 settings] to open the settings screen, and tap [Firmware Update].

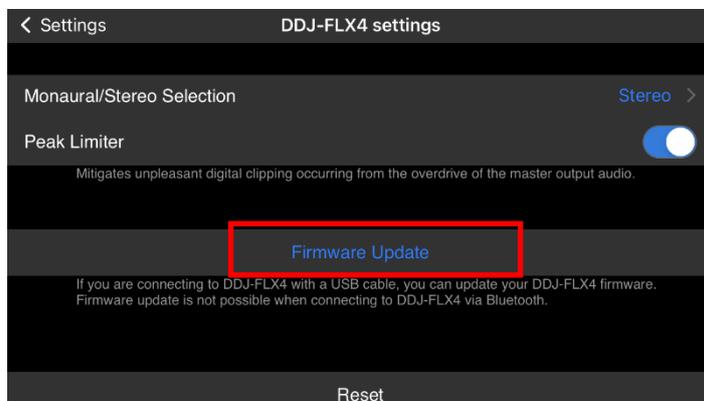

\* If the firmware is already the latest one, the message "Your DDJ-FLX4 firmware is up to date" is displayed.


### 3. Start the firmware update.

Tap [Update now].

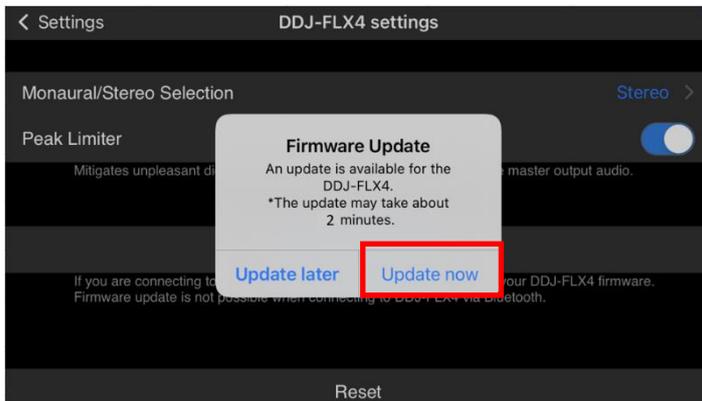

Read the terms of the Software End User License Agreement carefully and if you agree to them, tap [Agree].


\* If you do not agree to the contents of the License Agreement, click [Cancel] to cancel the update.

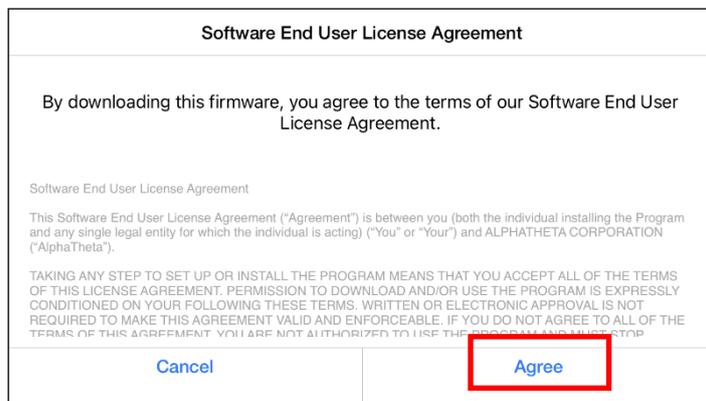

### 4. During the update


Wait until it reaches 100%.

While the update is in progress, the level indicator of DDJ-FLX4 blinks.

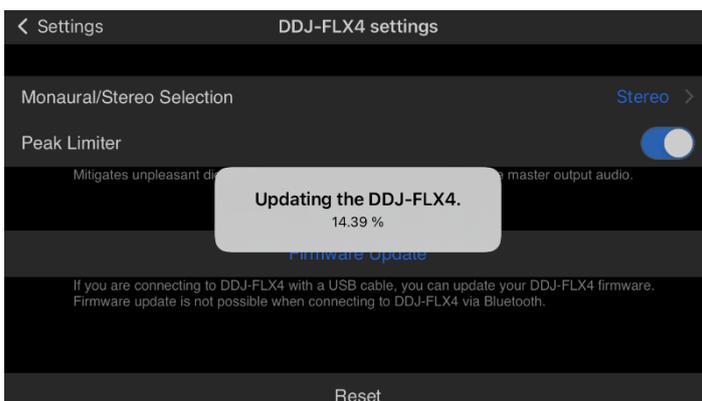

**5. The update process is complete.**

Tap [OK] when the following screen appears.

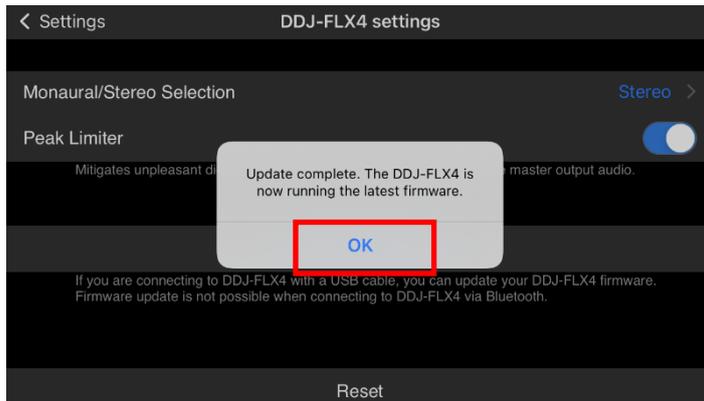

**6. Restart the DDJ-FLX4.**

Unplug the USB cable to turn off the DDJ-FLX4, then plug the USB cable again to turn on the power.

**D. Checking the firmware version**

Check the firmware version of the DDJ-FLX4 as described in "**A. Checking the current firmware version of DDJ-FLX4**". When you find the version you wanted, the firmware update is successfully complete.

**Tips : When you fail to update the firmware**

If you fail to update, disconnect all the USB cables, and start from "**B. Preparing for the update on the DDJ-FLX4**".

**[ Reference information ]**

For information on the supported operating systems, visit the URL below.

[rekordbox.com/en/feature/mobile/](http://rekordbox.com/en/feature/mobile/)

The update will take about 2 minutes.

**The images may differ from the ways described in this Guide.**

## About Trademarks and Registered Trademarks

- Pioneer DJ is a trademark of PIONEER CORPORATION and is used under license.
- rekordbox™ is a trademark or registered trademark of AlphaTheta Corporation.
- Mac, OS X and macOS are trademarks of Apple Inc., registered in the U.S. and other countries.
- iOS is a trademark containing Cisco trademark signs in the U.S. and other countries.
- Android, YouTube, Google Play and the Google Play logo are registered trademarks of Google LLC.
- Windows is a registered trademark of Microsoft Corporation in the U.S. and other countries.
- Other product, technology and company names, etc. mentioned herein are trademarks or registered trademarks of their respective owners.

©2023 AlphaTheta Corporation. All rights reserved.

---

### AlphaTheta Corporation

6F, Yokohama i-Mark Place, 4-4-5 Minatomirai, Nishi-ku, Yokohama, Kanagawa 220-0012 Japan