

DJ Controller

# DDJ-REV5



## Firmware Update Guide

## A. Checking the current firmware version of the DDJ-REV5

1. Connect your DDJ-REV5 to your PC/Mac using the USB cable.


2. Launch the Setting Utility.

- For Mac:
  1. In Finder, open the [Applications] folder.
  2. Click [Pioneer] > [DDJ-REV5] > [DDJ-REV5 Setting Utility].
- For Windows:

In the Windows [Start] menu, click [Pioneer] > [DDJ-REV5 Setting Utility].

3. Check the firmware version in the Setting Utility.

The firmware version is displayed in the [About] tab. (The figure below is a Mac version)

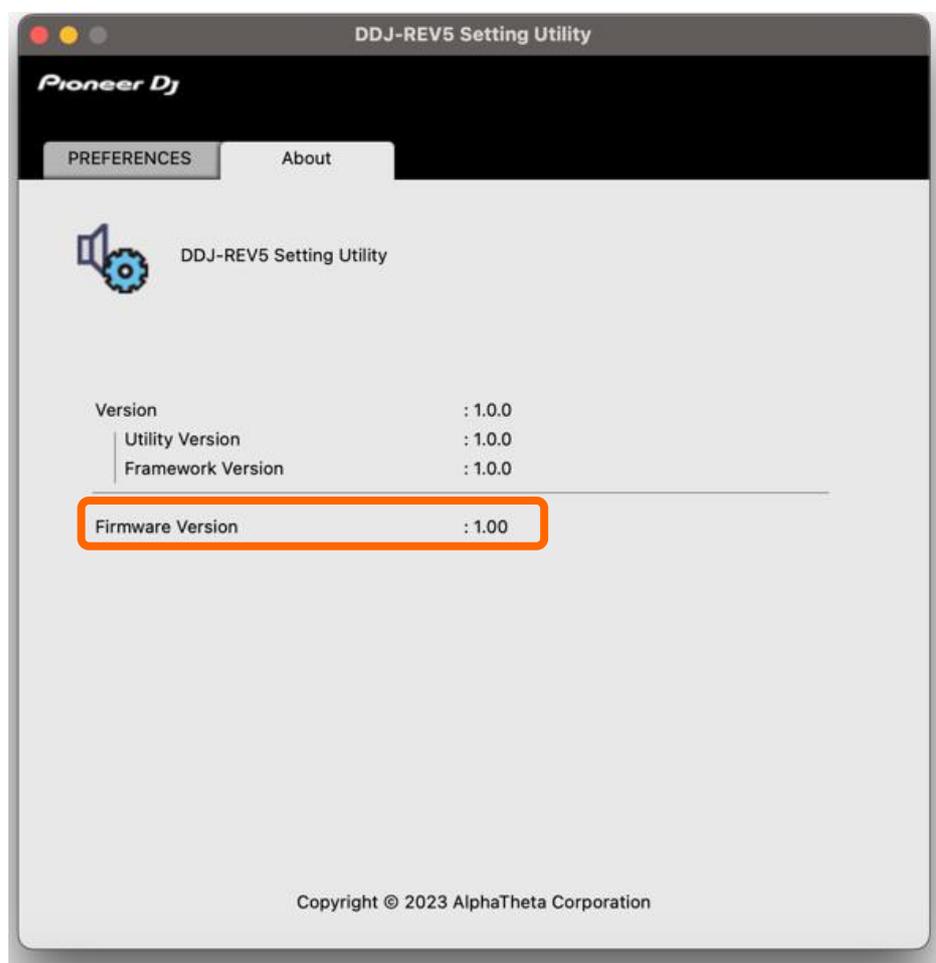

## **B. Checking the downloaded file**

### **1. Unzip the downloaded file.**

- For Mac:

Double-click [DDJ-REV5\_vxxx\_MAC64.dmg] to mount it.

- For Windows:

Save the downloaded file [DDJ-REV5\_vxxx\_WIN.zip] to a folder in any location such as desktop and unzip it.

### **2. Check the unzipped file.**

- For Mac:

Check the following file is included in the extracted [DDJ-REV5\_vxxx\_MAC64] folder.

[DDJ-REV5\_vxxx.app]

- For Windows:

Check the following file is included in the extracted [DDJ-REV5\_vxxx\_WIN] folder.

[DDJ-REV5\_vxxx.exe]

- ✓ **xxx** is the new version number of the firmware.
- ✓ Depending on your computer settings, the extension such as .exe or .app may not be displayed.

## C. Preparing for the update on the DDJ-REV5

### 1. Connect the DDJ-REV5 to your PC/Mac.

Connect your DDJ-REV5 to your PC/Mac using a USB cable.

**(Connect the USB cable to the USB-A terminal of the DDJ-REV5.)**

### 2. Turn on the power of the DDJ-REV5.

Press the power button on the rear panel of the DDJ-REV5 to turn on the power.



## D. Updating the firmware through your PC/Mac

### 1. Updating procedures


Before updating, close all the applications running on your PC/Mac.

#### <STEP1> Open the updater program.

- For Mac:  
Double click [DDJ-REV5\_vxxx.app].
- For Windows:  
Double click [DDJ-REV5\_vxxx.exe].

#### <STEP2> Select a language.

Select a language you want to use and click “OK”.

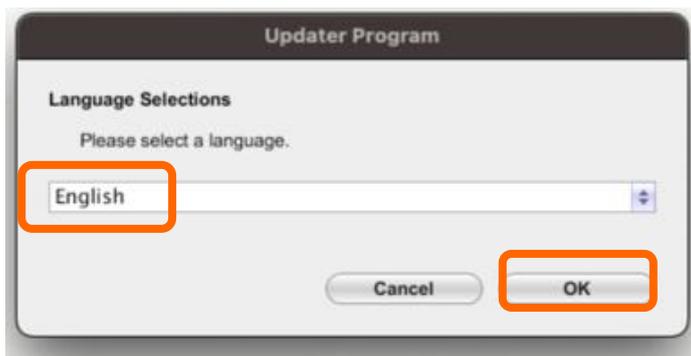

#### <STEP3> Check the firmware version.

Ensure that the version is **x.xx**. Click “Start”. (The figure below is an example.)

**Do not** disconnect the USB cable during the update.

Please use an **AC adaptor** to power your laptop during update.



#### <STEP4> During the update


Please wait until the progress bar reaches to the right end.



While the update is in progress, the master level indicator of DDJ-REV5 flashes.

**<STEP5> The update process is complete.**

If the message below is displayed, click "OK".

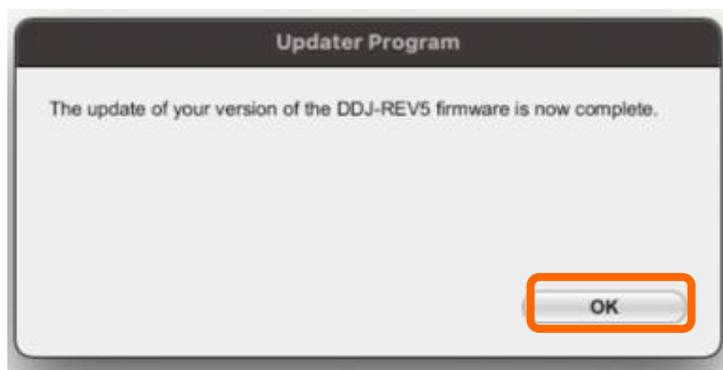

**<STEP6> Restart the DDJ-REV5.**

After the update is complete, the DDJ-REV5 will automatically restart.

## E. Checking the firmware version

Check the firmware version of the DDJ-REV5 as described in “**A. Checking the current firmware version of DDJ-REV5**”. When you find the version you wanted, the firmware update is successfully complete.

### Tips: When you fail to update the firmware

If the following message appears during the update, turn off the power of the DDJ-REV5 and then restart the update from “**C. Preparing for the update on the DDJ-REV5**”.



When the update is abnormally terminated, the DDJ-REV5 may launch in firmware update mode with the red at the top of the master level indicator flashing. In this case, please restart the update from “**D. Updating the firmware through your PC/Mac**” of the above updating procedures.

### [ Reference information ]

For information on the supported operating systems, visit the URL below.

[pioneerdj.com/support/](http://pioneerdj.com/support/)

The update will take about 1 minute.

**The images may differ from the ways described in this Guide.**

## About Trademarks and Registered Trademarks

- Pioneer DJ is a trademark of PIONEER CORPORATION and is used under license.
- Mac and Finder are trademarks of Apple Inc., registered in the U.S. and other countries and regions.
- Windows is a registered trademark of Microsoft Corporation in the U.S. and other countries.
- Other product, technology and company names, etc. mentioned herein are trademarks or registered trademarks of their respective owners.

©2024 AlphaTheta Corporation. All rights reserved.

---

### **AlphaTheta Corporation**

6F, Yokohama i-Mark Place, 4-4-5 Minatomirai, Nishi-ku, Yokohama, Kanagawa 220-0012 Japan