

Pioneer

DJ CONTROLLER

DDJ-SX2



<http://pioneeordj.com/support/>

The Pioneer DJ support site shown above offers FAQs, information on software and various other types of information and services to allow you to use your product in greater comfort.

Firmware Update Guide

Read Before Use <Important>

- Unzip the downloaded update file for updating.
- If Java has not been installed, please download the Java Runtime Environment (JRE) at: <http://java.com> and install it on your computer.
- ASIO driver exclusively for DDJ-SX2 is required to be installed for Windows PC users.
- If you should have any questions, please contact the Pioneer Customer Support Center.

Reference Information


This updater has been verified to operate on the operating systems below;

- Windows® 7/ Windows® 8/ Windows® 8.1
- Mac OS X : 10.6/ 10.7/ 10.8/ 10.9

Updating Procedures


Note: Turn the power off and disconnect all the cables from the unit. And close all applications on your computer before running this updating procedure.

- 1) Connect your computer to DDJ-SX2 via the USB cable included with the product.
- 2) Turn on the power of DDJ-SX2 while pressing the [SHIFT] button and the [SYNC] button on the LEFT deck, and ensure the Level meter LEDs flash before releasing your finger from the these buttons.

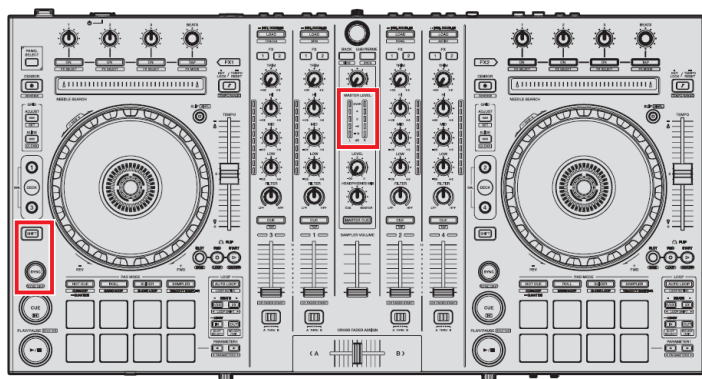

- 3) After waiting for about 10 seconds when the update file for DDJ-SX2 (DDJ-SX2_Vxxx.jar) is activated, the following dialogue is displayed. Click the [Start] button.

- If an error message is displayed, press the [Close] button to close the controller and then activate the update file again.
- Approximately a few minutes are required for updating.

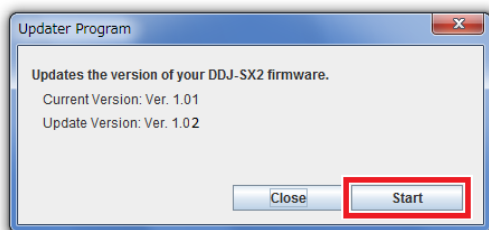

- 4) When the firmware update process is complete, click the [OK] button.


Note: Please note that if you fail to update, turn on the power of DDJ-SX2 again and start from Step 2) of the above Updating Procedures.

How to check the Firmware Version

For Windows

From the [Start menu], Run [All Programs] → [Pioneer] → [DDJ-SX2] → [DDJ-SX2 Version Display Utility].

— Click [DDJ-SX2 Version Display Utility] tile on the Start Screen for Windows 8.

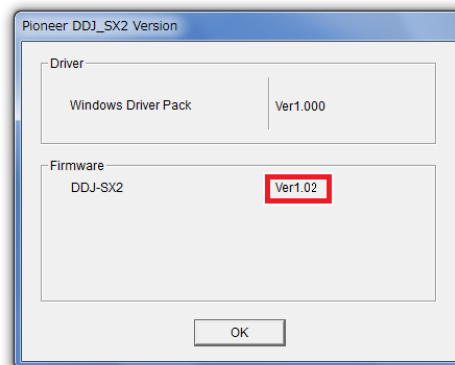


For Mac OS X

Open the Apple menu while pressing the option key, then select "System Profiler" or "System Information."



Select the [USB] from the [Hardware] to display the name of the controller. Select the controller to display the firmware version.

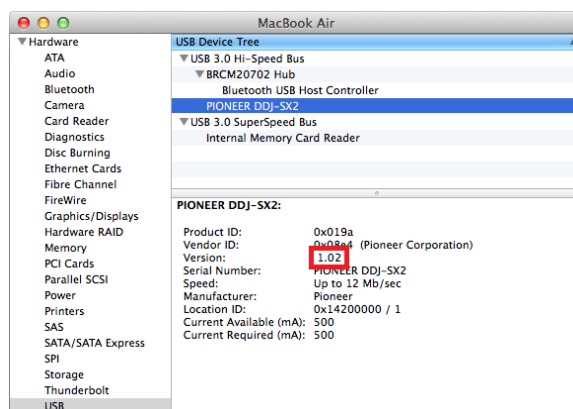

About Trademarks and Registered Trademarks

- Pioneer is a registered trademark of PIONEER CORPORATION.
- JAVA is a trademarks of Sun Microsystems, Inc. registered in the United States and other countries.
- Windows Vista® and Windows® are either registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.
- Mac OS is trademarks of Apple Inc. registered in the United State and other countries.

© 2014 PIONEER CORPORATION.
All rights reserved.
PIONEER CORPORATION