

Pioneer Dj

DJ MIXER

DJM-S5

Firmware Update Guide

Read Before Use

- Driver exclusively for DJM-S5 is required to be installed for PC/Mac. Please refer to Instruction Manual for the procedure.
- If Java has not been installed, please download the Java Runtime Environment (JRE) at: <https://java.com> and install it on your computer.

A. How to check the current Firmware Version of DJM-S5

1. Connect DJM-S5 to your computer using a USB cable.

2. Launch the Settings Utility.

For Windows:


[Start] menu > [All Programs] > [Pioneer] -> [DJM-S5] -> [DJM-S5 Settings Utility]

For Mac OS:

[Application] > [Pioneer] > [DJM-S5] > [DJM-S5 Settings Utility]

3. Check the Firmware Version in the Settings Utility

The firmware version is displayed in the [About] tab.

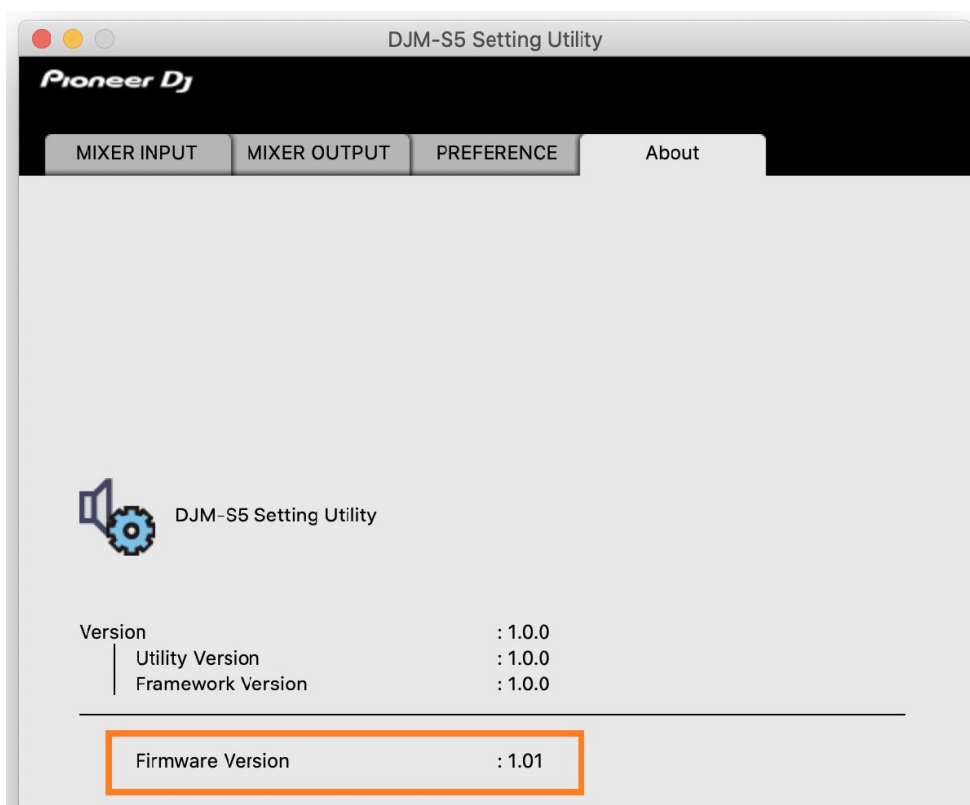

B. Download and unzip the update file

1. Unzip the downloaded file.

Save the downloaded file [DJM-S5_Verxxx.zip] to an arbitrary folder such as desk top and unzip it.

2. Check the unzipped file.

The [DJM-S5_Verxxx] folder is generated when the file is unzipped.

Please ensure the following files are included in the folder.

[DJM-S5_UsbDdjUpdaterApp_vxxx.jar]

✓ **xxx is numerical characters of the new firmware version.**

C. Preparation for updating DJM-S5

1. Connect DJM-S5 and a computer.

Connect DJM-S5 to your computer using a USB cable.

2. Activate the update mode.

Press the power button while pressing the [FX1/CUT1] button and the [PAD5-8] buttons on the left deck.

Once the update mode is activated, the [REV] indicator light.



D. Updating the firmware using a computer

1. Updating procedures

Before updating, close all the applications running on the computer.

<STEP1> Activate the update program.


Double click [DJM-S5_UsbDdjUpdaterApp_vxxx.jar] to activate the update file.

<STEP2> Check the firmware version before updating.

After ensuring that the firmware version is **x.xx**, click on the [Start] button.


Ensure that the power cable and the USB cable are securely connected to DJM-S5 during the update.

Please make sure to use an AC adaptor to power your laptop during updating the firmware.

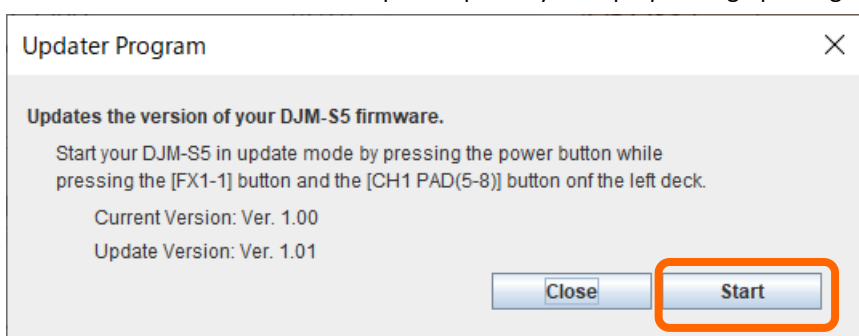

The updating process starts.

Please wait until the progress bar reaches to the right end.

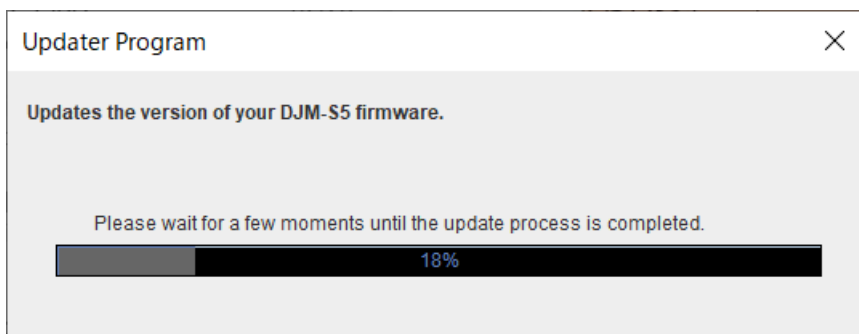

<STEP3> Complete the updating process.

When the firmware update process is complete and the message below appears, click the [OK] button.



E. Check the firmware version

Check the firmware version of DJM-S5 as described in [A. How to check the current Firmware Version of DJM-S5].

The firmware update is successfully completed when you find the version you wanted in the Settings Utility.

[Reference information]

This updater has been verified to operate on the operating systems below:

Windows : Windows 11

Windows 10

MacOS : macOS Monterey 12

macOS Big Sur 11

macOS Catalina 10.15

macOS Mojave 10.14

The images shown in this Guide may not be the same as the current ones.

Trademarks and registered trademarks

- Mac and macOS are trademarks of Apple Inc., registered in the U.S. and other countries.
- Windows is a registered trademark of Microsoft Corporation in the U.S. and other countries.
- Oracle and Java are registered trademarks of Oracle and/or its affiliates.
- Other product, technology and company names, etc. mentioned herein are trademarks or registered trademarks of their respective owners.