

***Pioneer Dj***

**DJ MIXER**

**DJM-S7**

**Firmware Update Guide**

## Read Before Use

- If Java has not been installed, please download the Java Runtime Environment (JRE) at: <https://java.com> and install it on your computer.

### A. Check the current Firmware Version of DJM-S7

**1. Connect the DJM-S7 to your computer.**

**2. Launch the Settings Utility.**

For Windows:


[Start] menu > [All Programs] > [Pioneer] -> [DJM-S7 Settings Utility]

For Mac OS:

[Application] > [Pioneer] > [DJM-S7] > [DJM-S7 Settings Utility]

**3. Check the firmware version.**

The firmware version is displayed in the [About] tab.

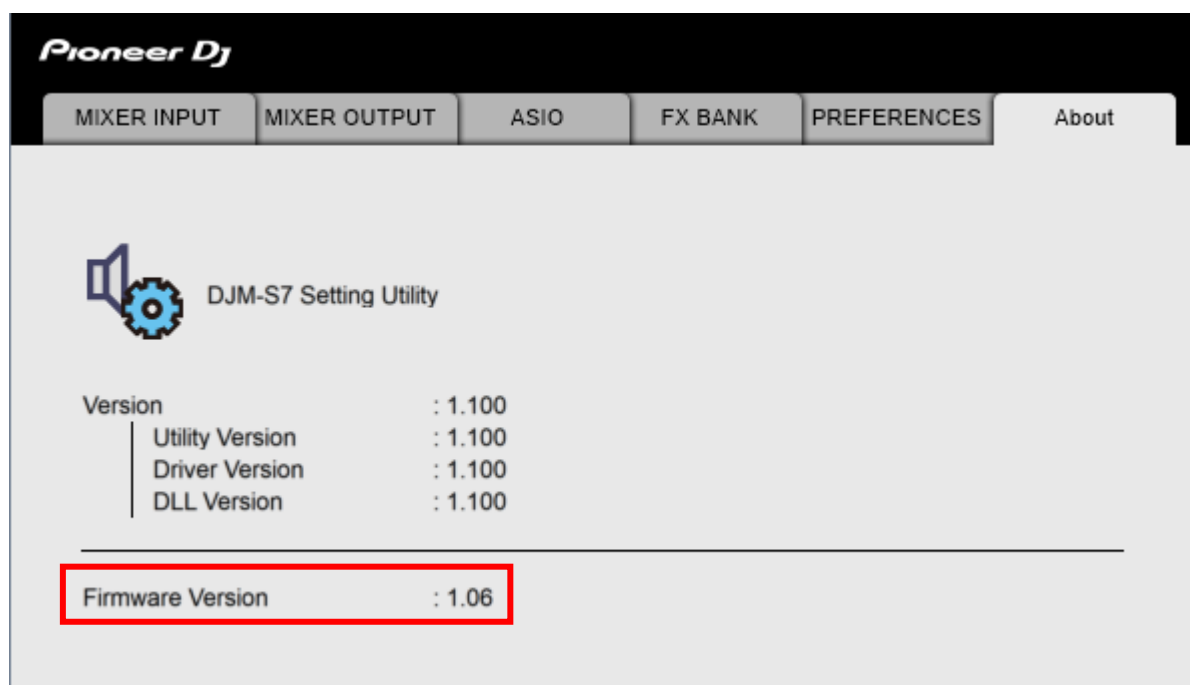

The firmware version is also shown on the DJM-S7 display at startup.

### B. Download and unzip the update file

**1. Unzip the downloaded file.**

Save the downloaded file [DJM-S7\_Verxxx.zip] to an arbitrary folder such as desktop and unzip it.

**2. Check the unzipped file.**

The [DJM-S7\_Verxxx] folder is generated when the file is unzipped.

Please ensure the following files are included in the folder.

[DJM-S7\_UsbDdjUpdaterApp\_vxxx.jar]

- ✓ xxx is the number of the new firmware version.

## C. Prepare for updating DJM-S7

### 1. Connect the DJM-S7 and a computer.

Connect the DJM-S7 to your computer using a USB cable.

(Connect the USB cable to the [USB-A] port.)

### 2. Activate the update mode.

Press the power button while pressing the [BACK] button and the [PARAMETER1 LEFT] buttons on the left.

Once the update mode is activated, the [CLIP] on the level meter flashes.



## D. Update the firmware using a computer

### 1. Updating procedures

Close all the applications running on the computer before the update.

#### <STEP1> Activate the updater program.


Double click [DJM-S7\_UsbDdjUpdaterApp\_vxxx.jar] to activate the update file.

#### <STEP2> Check the firmware version before updating.

After ensuring that the firmware version is **x.xx**, click on the [Start] button.


Ensure that the power cable and the USB cable are securely connected to DJM-S7 during the update.

Please make sure to use an AC adaptor to power your laptop during the update.

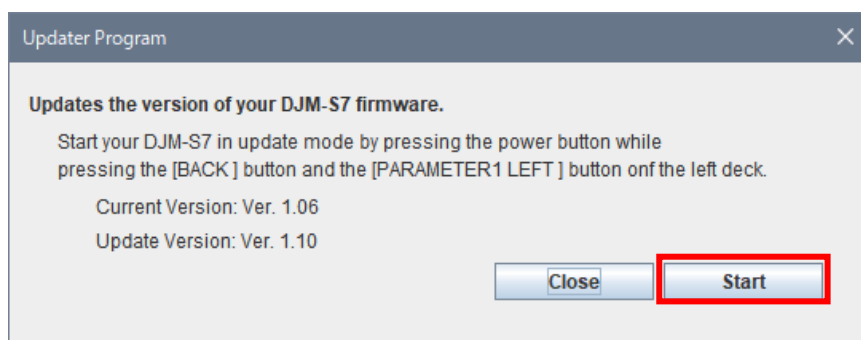

#### The updating process starts.

Please wait until the progress bar reaches to the right end.

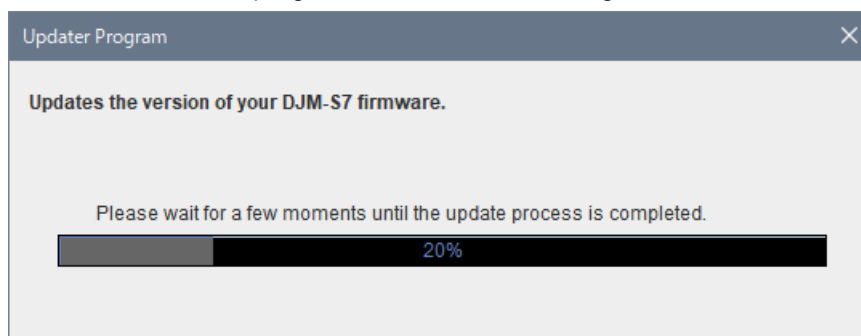

#### <STEP3> Complete the updating process.

When the update is complete and the message below appears, click the [OK] button.



## E. Check the firmware version

- ☐ Check the firmware version of DJM-S7 as described in [A. Check the current Firmware Version of DJM-S7].
- ☐ The firmware update is successfully complete when you find the version as you wanted.

### [Reference information]

For information on the supported operating systems, visit the URL below.

[pioneerdj.com/support/](https://pioneerdj.com/support/)

The images shown in this Guide may not be the same as the current ones.

### Trademarks and registered trademarks

- Mac and macOS are trademarks of Apple Inc., registered in the U.S. and other countries and regions.
- Windows is a trademark or registered trademark of Microsoft Corporation in the U.S. and other countries.
- Oracle and Java are registered trademarks of Oracle and/or its affiliates.
- Other product, technology and company names, etc. mentioned herein are trademarks or registered trademarks of their respective owners.