

Pioneer Dj

DJ PLAYER

PLX-CRSS12

Firmware Update Guide

Read Before Use

- If Java has not been installed, please download the Java Runtime Environment (JRE) at: <https://java.com> and install it on your computer.

A. Check the current Firmware Version of PLX-CRSS12

1. Power on the PLX-CRSS12.

2. Open the Utility screen.

Press and hold the [DECK/UTILITY] button.

3. Check the firmware version.

The firmware version is displayed on the screen.

B. Download and unzip the update file

1. Unzip the downloaded file.

Save the downloaded file [PLX-CRSS12_Verxxx.zip] to a folder such as desk top and unzip it.

2. Check the unzipped file.

The [PLX-CRSS12_Verxxx] folder is generated when the file is unzipped.

Please ensure the following files are included in the folder.

[PLX-CRSS12_UsbDdjUpdaterApp_vxxx.jar]

xxx is number of the new firmware version.

C. Prepare for updating PLX-CRSS12


1. Connect PLX-CRSS12 and a computer.

Connect PLX-CRSS12 to your computer using a USB cable.

2. Activate the update mode.

Press the power button while pressing the [STEP PITCH] button and the [TEMPO RANGE] buttons.

Once the update mode is activated, "UPDATE" is displayed on the screen.

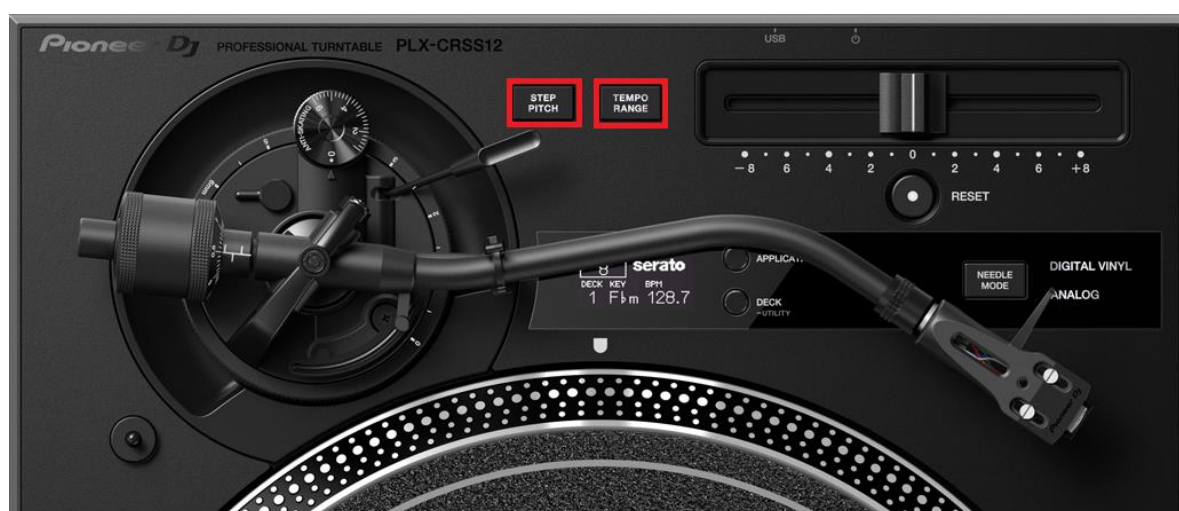

D. Update the firmware using a computer

1. Update procedures

Close all applications running on the computer before the update.

<STEP1> Activate the updater program.


Double click [PLX-CRSS12_UsbDdjUpdaterApp_vxxx.jar] to activate the update file.

<STEP2> Check the firmware version before updating.

After ensuring that the firmware version is **x.xx**, click on the [Start] button.


Ensure that the power cable and the USB cable are securely connected to PLX-CRSS12 during the update.

Be sure to use an AC adaptor to power your laptop during the update.

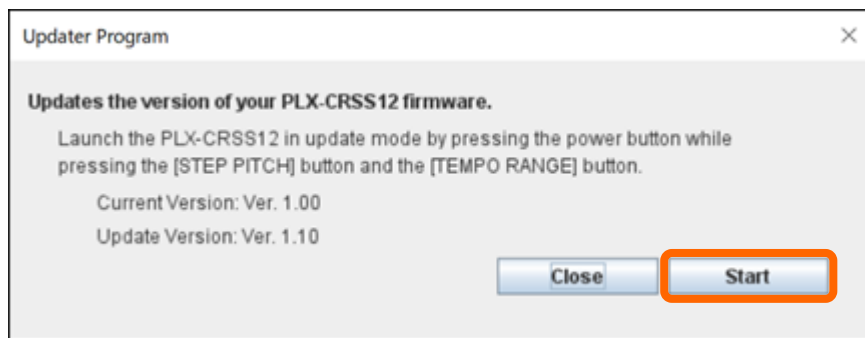

The updating process starts.

Please wait until the progress bar reaches to the right end.

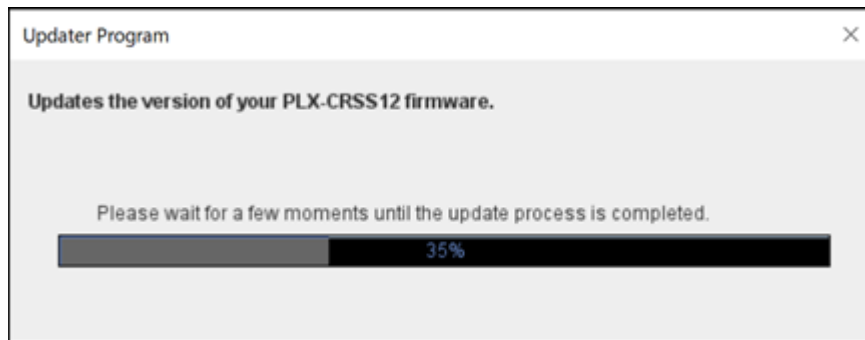

<STEP3> Complete the updating process.

When the firmware update is complete and the message below appears, click the [OK] button.



E. Check the firmware version

- Check the firmware version of PLX-CRSS12 as described in [A. Check the current Firmware Version of PLX-CRSS12].
- The firmware update is successfully complete when you find the version as you wanted.

[Reference information]

For information on the supported operating systems, visit the URL below.

pioneerdj.com/support/

The images shown in this Guide may not be the same as the current ones.

Trademarks and registered trademarks

- Mac and macOS are trademarks of Apple Inc., registered in the U.S. and other countries and regions.
- Windows is a trademark or registered trademark of Microsoft Corporation in the U.S. and other countries.
- Oracle and Java are registered trademarks of Oracle and/or its affiliates.
- Other product, technology and company names, etc. mentioned herein are trademarks or registered trademarks of their respective owners.