


SLAB

List of MIDI Messages

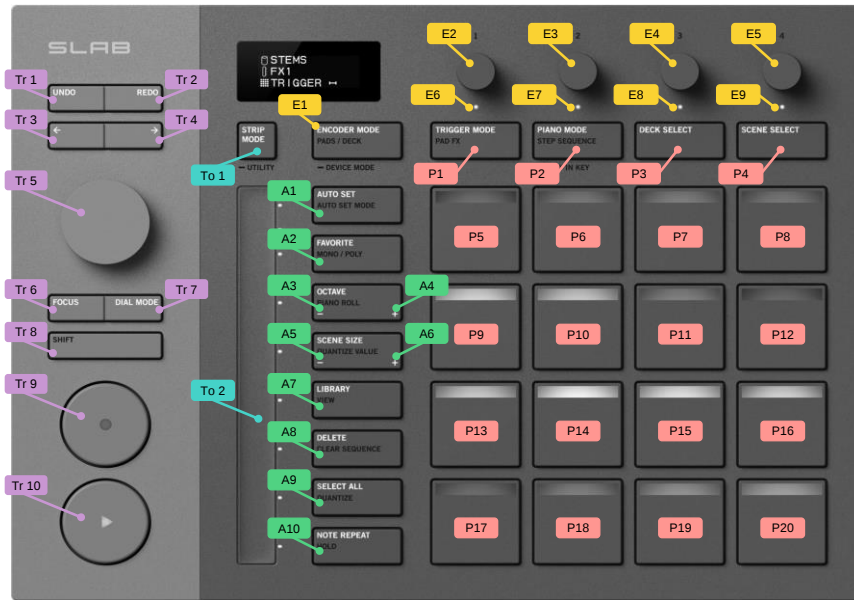

Group	Fig.	User Interface				MIDI assign reference ①				MIDI-IN (to computer)			MIDI-OUT (from computer)			Details (Data2)	
		UI name	Condition (mode)	Trigger	+SHIFT	MIDI Channel (Dec)	Type	MIDI Data (Data1)		Status (Hex)	Data 1 (Hex)	Data 2 (Hex)	Status (Hex)	Data 1 (Hex)	Data 2 (Hex)		
								(Dec)	(English scale)								
Transport	Tr1	UNDO button		press		1	NOTE	81	A5	90	51	hh	90	51	hh	OFF=0x00, ON=0x7F	
					+SHIFT	1	NOTE	80	G#5	90	50	hh	90	50	hh	OFF=0x00, ON=0x7F	
	Tr2	REDO button		press		1	NOTE	82	A#5	90	52	hh	90	52	hh	OFF=0x00, ON=0x7F	
					+SHIFT	1	NOTE	83	B5	90	53	hh	90	53	hh	OFF=0x00, ON=0x7F	
	Tr3	<- button		press		1	NOTE	100	E7	90	64	hh	90	64	hh	OFF=0x00, ON=0x7F	
					+SHIFT	1	NOTE	96	C7	90	60	hh	90	60	hh	OFF=0x00, ON=0x7F	
	Tr4	-> button		press		1	NOTE	101	F7	90	65	hh	90	65	hh	OFF=0x00, ON=0x7F	
					+SHIFT	1	NOTE	97	C#7	90	61	hh	90	61	hh	OFF=0x00, ON=0x7F	
	Tr5	Dial	DIAL mode	rotate		1	CC	60	-	B0	3C	hh	-	-	-	Value CW=0x01, Value CCW=0x41	
				press		+SHIFT	1	CC	61	-	B0	3D	hh	-	-	-	Value CW=0x01, Value CCW=0x41
Encoder						1	NOTE	98	D7	90	62	hh	-	-	-	OFF=0x00, ON=0x7F	
					+SHIFT	1	NOTE	99	D#7	90	63	hh	-	-	-	OFF=0x00, ON=0x7F	
	Tr6	FOCUS button (*1)		press		1	NOTE	54	F#3	90	36	hh	-	-	-	OFF=0x00, ON=0x7F	
	Tr7	DIAL MODE button (*2)		press		1	NOTE	55	G3	90	37	hh	-	-	-	OFF=0x00, ON=0x7F	
					+SHIFT	1	NOTE	70	A#4	90	46	hh	-	-	-	OFF=0x00, ON=0x7F	
	Tr9	REC button		press		1	NOTE	95	B6	90	5F	hh	90	5F	hh	OFF=0x00, ON=0x7F	
					+SHIFT	1	NOTE	91	G6	90	5B	hh	90	5B	hh	OFF=0x00, ON=0x7F	
	Tr10	PLAY/STOP button		press		1	NOTE	94	A#6	90	5E	hh	90	5E	hh	OFF=0x00, ON=0x7F	
					+SHIFT	1	NOTE	92	C#6	90	5C	hh	90	5C	hh	OFF=0x00, ON=0x7F	
							1	CC	16	-	B0	10	hh	-	-	-	Value CW=0x01, Value CCW=0x41
Encoder	E2	Encoder 1		rotate		+SHIFT	1	CC	20	-	B0	14	hh	-	-	-	Value CW=0x01, Value CCW=0x41
				touch		1	NOTE	24	C1	90	18	hh	-	-	-	OFF=0x00, ON=0x7F	
				press		1	NOTE	32	G#1	90	20	hh	-	-	-	OFF=0x00, ON=0x7F	
					+SHIFT	1	NOTE	36	C2	90	24	hh	-	-	-	OFF=0x00, ON=0x7F	
	E3	Encoder 2		rotate		1	CC	17	-	B0	11	hh	-	-	-	Value CW=0x01, Value CCW=0x41	
				touch		+SHIFT	1	CC	21	-	B0	15	hh	-	-	-	Value CW=0x01, Value CCW=0x41
				press		1	NOTE	25	C#1	90	19	hh	-	-	-	OFF=0x00, ON=0x7F	
					+SHIFT	1	NOTE	33	A1	90	21	hh	-	-	-	OFF=0x00, ON=0x7F	
							1	CC	18	-	B0	12	hh	-	-	-	Value CW=0x01, Value CCW=0x41
					+SHIFT	1	CC	22	-	B0	16	hh	-	-	-	Value CW=0x01, Value CCW=0x41	
Encoder	E4	Encoder 3		rotate		1	NOTE	26	D1	90	1A	hh	-	-	-	OFF=0x00, ON=0x7F	
				touch		1	NOTE	34	A#1	90	22	hh	-	-	-	OFF=0x00, ON=0x7F	
					+SHIFT	1	NOTE	38	D2	90	26	hh	-	-	-	OFF=0x00, ON=0x7F	
	E5	Encoder 4		rotate		1	CC	19	-	B0	13	hh	-	-	-	Value CW=0x01, Value CCW=0x41	
				touch		+SHIFT	1	CC	23	-	B0	17	hh	-	-	-	Value CW=0x01, Value CCW=0x41
				press		1	NOTE	27	D#1	90	1B	hh	-	-	-	OFF=0x00, ON=0x7F	
					+SHIFT	1	NOTE	35	B1	90	23	hh	-	-	-	OFF=0x00, ON=0x7F	
	E6	Encoder 1 indicator				1	NOTE	39	D#2	90	27	hh	-	-	-	HH: lit in color specified in color number(0x01-0x7F)	
					+SHIFT	1	NOTE	32	G#1	-	-	-	90	20	HH	HH: lit in color specified in color number(0x01-0x7F)	
	E7	Encoder 2 indicator				1	NOTE	36	C2	-	-	-	90	24	HH	HH: lit in color specified in color number(0x01-0x7F)	
Touch strip	E8	Encoder 3 indicator				+SHIFT	1	NOTE	37	C#2	-	-	-	90	25	HH	HH: lit in color specified in color number(0x01-0x7F)
	E9	Encoder 4 indicator				+SHIFT	1	NOTE	34	A#1	-	-	-	90	22	HH	HH: lit in color specified in color number(0x01-0x7F)
					+SHIFT	1	NOTE	38	D2	-	-	-	90	26	HH	HH: lit in color specified in color number(0x01-0x7F)	
					+SHIFT	1	NOTE	35	B1	-	-	-	90	23	HH	HH: lit in color specified in color number(0x01-0x7F)	
	To1	STRIP MODE button (*3)		press		7	NOTE	64	E4	96	40	hh	-	-	-	OFF=0x00, ON=0x7F	
					+SHIFT	7	NOTE	65	F4	96	41	hh	-	-	-	OFF=0x00, ON=0x7F	
	To2	Touch strip	Mode 1	slide		7	CC	14	-	B6	0E	MSB LSB	-	-	-	Min(MSB:0x00 LSB:0x00) - Max(MSB:0x7F LSB:0x7F)	
					+SHIFT	7	CC	15	-	B6	0F	MSB LSB	-	-	-	Min(MSB:0x00 LSB:0x00) - Max(MSB:0x7F LSB:0x7F)	
				touch		7	NOTE	72	C5	96	48	hh	-	-	-	OFF=0x00, ON=0x7F	
					+SHIFT	7	NOTE	73	C#5	96	49	hh	-	-	-	OFF=0x00, ON=0x7F	
App control			Mode 2	slide		7	CC	16	-	B6	10	MSB LSB	-	-	-	Min(MSB:0x00 LSB:0x00) - Max(MSB:0x7F LSB:0x7F)	
					+SHIFT	7	CC	17	-	B6	11	MSB LSB	-	-	-	Min(MSB:0x00 LSB:0x00) - Max(MSB:0x7F LSB:0x7F)	
				touch		7	NOTE	74	D5	96	4A	hh	-	-	-	OFF=0x00, ON=0x7F	
					+SHIFT	7	NOTE	75	D#5	96	4B	hh	-	-	-	OFF=0x00, ON=0x7F	
	A1	AUTOSET button		press		7	NOTE	80	G#5	96	50	hh	96	50	hh	OFF=0x00, ON=0x7F	
					+SHIFT	7	NOTE	81	A5	96	51	hh	96	51	hh	OFF=0x00, ON=0x7F	
	A2	FAVORITE button		press		7	NOTE	82	A#5	96	52	hh	96	52	hh	OFF=0x00, ON=0x7F	
					+SHIFT	7	NOTE	83	B5	96	53	hh	96	53	hh	OFF=0x00, ON=0x7F	
	A3	OCTAVE- button (*4)		press		7	NOTE	84	C6	96	54	hh	96	54	hh	OFF=0x00, ON=0x7F	
					+SHIFT	7	NOTE	85	C#6	96	55	hh	96	55	hh	OFF=0x00, ON=0x7F	
A4	OCTAVE+ button (*4)		press		7	NOTE	86	D6	96	56	hh	96	56	hh	OFF=0x00, ON=0x7F		
				+SHIFT	7	NOTE	87	D#6	96	57	hh	96	57	hh	OFF=0x00, ON=0x7F		
A6	SCENE SIZE- button		press		7	NOTE	88	E6	96	58	hh	96	58	hh	OFF=0x00, ON=0x7F		
				+SHIFT	7	NOTE	89	F6	96	59	hh	96	59	hh	OFF=0x00, ON=0x7F		
A6	SCENE SIZE+ button		press		7	NOTE	90	F#6	96	5A	hh	96	5A	hh	OFF=0x00, ON=0x7F		
				+SHIFT	7	NOTE	91	G6	96	5B	hh	96	5B	hh	OFF=0x00, ON=0x7F		
A7	LIBRARY button		press		7	NOTE	92	G#6	96	5C	hh	96	5C	hh	OFF=0x00, ON=0x7F		
				+SHIFT	7	NOTE	93	A6	96	5D	hh	96	5D	hh	OFF=0x00, ON=0x7F		
A8	DELETE button		press		7	NOTE	94	A#6	96	5E	hh	96	5E	hh	OFF=0x00, ON=0x7F		
				+SHIFT	7	NOTE	95	B6	96	5F	hh	96	5F	hh	OFF=0x00, ON=0x7F		
A9	SELECT ALL button		press		7	NOTE	96	C7	96	60	hh	96	60	hh	OFF=0x00, ON=0x7F		
				+SHIFT	7	NOTE	97	C#7	96	61	hh	96	61	hh	OFF=0x00, ON=0x7F		
A10	NOTE REPEAT button		press		7	NOTE	98	D7	96	62	hh	96	62	hh	OFF=0x00, ON=0x7F		
				+SHIFT	7	NOTE	99	D#7	96	63	hh	96	63	hh	OFF=0x00, ON=0x7F		

Group	Fig.	User Interface				MIDI assign reference		MIDI-IN (to computer)		MIDI-OUT (from computer)		Details (Data2)				
		UI name	Condition (mode)	Trigger	+SHIFT	MIDI Channel (Dec)	Type	MIDI Data (Dec)	MIDI Data (English)	Status (Hex)	Data 1 (Hex)		Data 2 (Hex)	Status (Hex)	Data 1 (Hex)	Data 2
P11	Pad 7	Page 1	press			8	NOTE	10	A#1	97	0A	hh	97	0A	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)
						8	NOTE	10	A#1	98	0A	hh	98	0A	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)
		Page 2	press			9	NOTE	26	D1	97	1A	hh	97	1A	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)
						8	NOTE	26	D1	A7	1A	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)
		Page 3	press			9	NOTE	26	D1	98	1A	hh	98	1A	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)
						8	NOTE	42	F#2	97	2A	hh	97	2A	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)
		Page 4	press			9	NOTE	42	F#2	98	2A	hh	98	2A	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)
						8	NOTE	58	A#3	97	3A	hh	97	3A	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)
	Page 5	press			9	NOTE	58	A#3	98	3A	hh	98	3A	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
					8	NOTE	74	D5	97	4A	hh	97	4A	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				9	NOTE	74	D5	98	4A	hh	98	4A	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)		
				8	NOTE	90	F#6	97	5A	hh	97	5A	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)		
				9	NOTE	90	F#6	98	5A	hh	98	5A	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)		
				8	NOTE	106	A#7	97	6A	hh	97	6A	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)		
		Page 7	press			9	NOTE	106	A#7	A7	6A	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)
						8	NOTE	106	A#7	98	6A	hh	98	6A	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)
				9	NOTE	122	D9	97	7A	hh	97	7A	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)		
				8	NOTE	122	D9	A7	7A	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)		
				9	NOTE	122	D9	98	7A	hh	98	7A	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)		
				8	NOTE	11	B-1	97	0B	hh	97	0B	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)		
	Page 8		press			9	NOTE	11	B-1	98	0B	hh	98	0B	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)
						8	NOTE	27	D#1	97	1B	hh	97	1B	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)
				9	NOTE	27	D#1	A7	1B	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)		
				8	NOTE	27	D#1	98	1B	hh	98	1B	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)		
			9	NOTE	43	G2	97	2B	hh	97	2B	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			8	NOTE	43	G2	A7	2B	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)			
			9	NOTE	43	G2	98	2B	hh	98	2B	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			8	NOTE	59	B3	97	3B	hh	97	3B	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
Page 5	press			9	NOTE	59	B3	A7	3B	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)		
				8	NOTE	75	D#5	97	4B	hh	97	4B	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)		
			9	NOTE	75	D#5	98	4B	hh	98	4B	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			8	NOTE	91	G6	97	5B	hh	97	5B	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			9	NOTE	91	G6	A7	5B	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)			
			8	NOTE	91	G6	98	5B	hh	98	5B	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			9	NOTE	107	B7	97	6B	hh	97	6B	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			8	NOTE	107	B7	A7	6B	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)			
Page 8	press			9	NOTE	107	B7	98	6B	hh	98	6B	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)		
				8	NOTE	123	D#9	97	7B	hh	97	7B	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)		
			9	NOTE	123	D#9	A7	7B	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)			
			8	NOTE	123	D#9	98	7B	hh	98	7B	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			9	NOTE	4	E-1	97	04	hh	97	04	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			8	NOTE	4	E-1	A7	04	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)			
	Page 2	press			9	NOTE	4	E-1	98	04	hh	98	04	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
					8	NOTE	20	G#0	97	14	hh	97	14	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
			9	NOTE	20	G#0	A7	14	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)			
			8	NOTE	36	C2	97	24	hh	97	24	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			9	NOTE	36	C2	A7	24	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)			
			8	NOTE	36	C2	98	24	hh	98	24	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			9	NOTE	52	E3	97	34	hh	97	34	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			8	NOTE	52	E3	A7	34	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)			
Page 5	press			9	NOTE	52	E3	98	34	hh	98	34	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)		
				8	NOTE	68	G#4	97	44	hh	97	44	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)		
			9	NOTE	68	G#4	A7	44	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)			
			8	NOTE	68	G#4	98	44	hh	98	44	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			9	NOTE	84	C6	97	54	hh	97	54	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			8	NOTE	84	C6	A7	54	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)			
			9	NOTE	84	C6	98	54	hh	98	54	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			8	NOTE	100	E7	97	64	hh	97	64	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
Page 8	press			9	NOTE	100	E7	98	64	hh	98	64	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)		
				8	NOTE	116	G#8	97	74	hh	97	74	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)		
			9	NOTE	116	G#8	A7	74	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)			
			8	NOTE	116	G#8	98	74	hh	98	74	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			9	NOTE	5	F-1	97	05	hh	97	05	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			8	NOTE	5	F-1	A7	05	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)			
	Page 2	press			9	NOTE	21	A0	97	15	hh	97	15	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
					8	NOTE	21	A0	97	15	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)	
			9	NOTE	21	A0	98	15	hh	98	15	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			8	NOTE	37	C#2	97	25	hh	97	25	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			9	NOTE	37	C#2	A7	25	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)			
			8	NOTE	37	C#2	98	25	hh	98	25	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			9	NOTE	53	F3	97	35	hh	97	35	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			8	NOTE	53	F3	A7	35	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)			
Page 5	press			9	NOTE	53	F3	98	35	hh	98	35	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)		
				8	NOTE	69	A4	97	45	hh	97	45	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)		
			9	NOTE	69	A4	A7	45	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)			
			8	NOTE	69	A4	98	45	hh	98	45	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			9	NOTE	85	C#6	97	55	hh	97	55	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			8	NOTE	85	C#6	A7	55	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)			
			9	NOTE	85	C#6	98	55	hh	98	55	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			8	NOTE	101	F7	97	65	hh	97	65	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
Page 8	press			9	NOTE	101	F7	A7	65	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)		
				8	NOTE	101	F7	98	65	hh	98	65	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)		
			9	NOTE	117	A8	97	75	hh	97	75	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			8	NOTE	117	A8	A7	75	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)			
			9	NOTE	117	A8	98	75	hh	98	75	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			8	NOTE	6	F#-1	97	06	hh	97	06	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
	Page 2	press			9	NOTE	6	F#-1	98	06	hh	98	06	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
					8	NOTE	22	A#0	97	16	hh	97	16	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
			9	NOTE	22	A#0	A7	16	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)			
			8	NOTE	22	A#0	98	16	hh	98	16	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			9	NOTE	38	D2	97	26	hh	97	26	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			8	NOTE	38	D2	A7	26	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)			
			9	NOTE	38	D2	98	26	hh	98	26	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			8	NOTE	54	F#3	97	36	hh	97	36	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
Page 5	press			9	NOTE	54	F#3	A7	36	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)		
				8	NOTE	54	F#3	98	36	hh	98	36	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)		
			9	NOTE	70	A#4	97	46	hh	97	46	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			8	NOTE	70	A#4	A7	46	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)			
			9	NOTE	70	A#4	98	46	hh	98	46	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			8	NOTE	86	D6	97	56	hh	97	56	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			9	NOTE	86	D6	A7	56	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)			
			8	NOTE	86	D6	98	56	hh	98	56	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
Page 7	press			9	NOTE	102	F#7	97	66	hh	97	66	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)		
				8	NOTE	102	F#7	A7	66	hh	-	-	HH	hh : 0x00(min) - 0x7F(max)		
			9	NOTE	102	F#7	98	66	hh	98	66	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)			
			8	NOTE	118	A#8										

Group	Fig.	User Interface				MIDI assign reference ¹⁾				MIDI-IN (to computer)		MIDI-OUT (from computer)		Details (Data2)		
		UI name	Condition (mode)	Trigger	+SHIFT	MIDI Channel (Dec)	Type	MIDI Data (Data3)		Status (Hex)	Data 1 (Hex)	Data 2 (Hex)	Status (Hex)		Data 1 (Hex)	Data 2 (Hex)
								(Dec)	(English scale)							
P17	Pad 13	Page 1	press		8	NOTE	0	C-1	97	00	hh	97	00	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	0	C-1	98	00	hh	98	00	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
		Page 2	press		8	NOTE	16	E0	97	10	hh	97	10	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	16	E0	98	10	hh	98	10	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
		Page 3	press		8	NOTE	32	G#1	97	20	hh	97	20	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	32	G#1	98	20	hh	98	20	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
		Page 4	press		8	NOTE	48	C3	97	30	hh	97	30	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	48	C3	98	30	hh	98	30	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
		Page 5	press		8	NOTE	64	E4	97	40	hh	97	40	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	64	E4	98	40	hh	98	40	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
		Page 6	press		8	NOTE	80	G#5	97	50	hh	97	50	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	80	G#5	98	50	hh	98	50	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
		Page 7	press		8	NOTE	96	C7	97	60	hh	97	60	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	96	C7	98	60	hh	98	60	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
		Page 8	press		8	NOTE	112	E8	97	70	hh	97	70	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	112	E8	98	70	hh	98	70	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
P18	Pad 14	Page 1	press		8	NOTE	1	C#-1	97	01	hh	97	01	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	1	C#-1	98	01	hh	98	01	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
		Page 2	press		8	NOTE	17	F0	97	11	hh	97	11	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	17	F0	A7	11	hh	-	-	-	hh : 0x00(min) - 0x7F(max)	
		Page 3	press		8	NOTE	33	A1	97	21	hh	97	21	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	33	A1	A7	21	hh	-	-	-	hh : 0x00(min) - 0x7F(max)	
		Page 4	press		8	NOTE	49	C#3	97	31	hh	97	31	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	49	C#3	A7	31	hh	-	-	-	hh : 0x00(min) - 0x7F(max)	
		Page 5	press		8	NOTE	65	F4	97	41	hh	97	41	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	65	F4	98	41	hh	98	41	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
		Page 6	press		8	NOTE	81	A5	97	51	hh	97	51	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	81	A5	A7	51	hh	-	-	-	hh : 0x00(min) - 0x7F(max)	
		Page 7	press		8	NOTE	97	C#7	97	61	hh	97	61	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	97	C#7	A7	61	hh	-	-	-	hh : 0x00(min) - 0x7F(max)	
		Page 8	press		8	NOTE	113	F8	97	71	hh	97	71	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	113	F8	A7	71	hh	-	-	-	hh : 0x00(min) - 0x7F(max)	
P19	Pad 15	Page 1	press		8	NOTE	2	D-1	97	02	hh	97	02	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	2	D-1	A7	02	hh	-	-	-	hh : 0x00(min) - 0x7F(max)	
		Page 2	press		8	NOTE	18	F#0	97	12	hh	97	12	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	18	F#0	98	12	hh	98	12	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
		Page 3	press		8	NOTE	34	A#1	97	22	hh	97	22	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	34	A#1	A7	22	hh	-	-	-	hh : 0x00(min) - 0x7F(max)	
		Page 4	press		8	NOTE	50	D3	97	32	hh	97	32	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	50	D3	A7	32	hh	-	-	-	hh : 0x00(min) - 0x7F(max)	
		Page 5	press		8	NOTE	66	F#4	97	42	hh	97	42	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	66	F#4	98	42	hh	98	42	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
		Page 6	press		8	NOTE	82	A#5	97	52	hh	97	52	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	82	A#5	A7	52	hh	-	-	-	hh : 0x00(min) - 0x7F(max)	
		Page 7	press		8	NOTE	98	D7	97	62	hh	97	62	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	98	D7	A7	62	hh	-	-	-	hh : 0x00(min) - 0x7F(max)	
		Page 8	press		8	NOTE	114	F#8	97	72	hh	97	72	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	114	F#8	A7	72	hh	-	-	-	hh : 0x00(min) - 0x7F(max)	
P20	Pad 16	Page 1	press		8	NOTE	3	D#-1	97	03	hh	97	03	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	3	D#-1	A7	03	hh	-	-	-	hh : 0x00(min) - 0x7F(max)	
		Page 2	press		8	NOTE	19	G0	97	13	hh	97	13	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	19	G0	98	13	hh	98	13	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
		Page 3	press		8	NOTE	35	B1	97	23	hh	97	23	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	35	B1	98	23	hh	98	23	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
		Page 4	press		8	NOTE	51	D#3	97	33	hh	97	33	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	51	D#3	98	33	hh	98	33	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
		Page 5	press		8	NOTE	67	G4	97	43	hh	97	43	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	67	G4	98	43	hh	98	43	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
		Page 6	press		8	NOTE	83	B5	97	53	hh	97	53	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	83	B5	A7	53	hh	-	-	-	hh : 0x00(min) - 0x7F(max)	
		Page 7	press		8	NOTE	99	D#7	97	63	hh	97	63	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	99	D#7	A7	63	hh	-	-	-	hh : 0x00(min) - 0x7F(max)	
		Page 8	press		8	NOTE	115	G8	97	73	hh	97	73	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	
				+SHIFT	9	NOTE	115	G8	98	73	hh	98	73	HH	hh : 0x00(min) - 0x7F(max) / HH : It in color specified in color number(0x01-0x7F)	