

*Pioneer Dj*

**PROFESSIONAL SAMPLER**

**TORAIZ SP-16**

**TSP-16**

Factory Sample and Demo Project

Installation Manual

---

## Introduction

---

Thank you and congratulations on your TORAIZ SP-16 purchase.

This document is a guide for customers to update or restore the factory demo projects and/or sample packs provided by Loopmasters ([loopmasters.com](http://loopmasters.com)). This document will guide you through the process of re-installing and repairing the necessary files.

---

## Decompressing the Downloaded File

---

Decompress the file and the following folders will appear.

TORAIZ SP-16 Factory Samples.zip: LOOPMASTERS SAMPLE PACK

TORAIZ SP-16 Factory Projects.zip: TORAIZ SP-16 Factory Projects

---

## Connecting to a Computer

---

Connect the unit to a computer with a USB cable. Open the UTILITY menu and enable USB MASS STORAGE MODE. You will be able to access the internal flash memory from your computer.

- When disconnecting, follow the instructions on the popup and safely remove the device from your computer.
  - DO NOT disconnect the unit while it is connected with the computer. It may lose internal utility data or corrupt data.
- 


## Installing the Factory Samples

---


1. Copy the decompressed LOOPMASTERS SAMPLE PACK to the unit's directory

/PIONEER DJ SAMPLER/Samples

If the "Samples" folder does not exist, please create the required folders using your computer's folder creation feature.

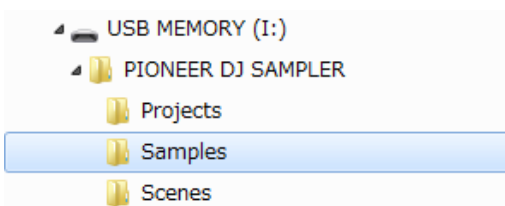

<Windows OS example>

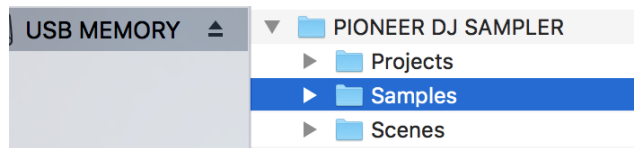

<Mac OS example>

2. When copying is done, disconnect safely from your computer and exit USB MASS STORAGE MODE.
  3. Navigate to HOME > TRACK MENU > BROWSE and set the FILTER TYPE to FOLDER. Open the folder Samples [INTERNAL] and check if LOOPMASTERS SAMPLE PACK has been copied successfully.
    - When the unit's internal flash memory is full the samples might not transfer correctly. Relocate or backup other samples to your computer in order to free up memory.
-

## Installing the Demo Projects

---

1. Open the decompressed folder TORAIZ SP-16 Factory Projects and confirm the following files exists.

Demo 01 House Techno EDM.prj

Demo 02 Dubstep Trap.prj

Demo 03 Hip Hop.prj

Demo 04 Drum n Bass.prj


Demo 05 Ambient Chill.prj

Copy the above files to the unit's directory below.


**/PIONEER DJ SAMPLER/Projects**

\*If these project files already exist in the /PIONEER DJ SAMPLER/Projects folder, please overwrite the existing project files with the new ones.

\*If the "Projects" folder does not exist, please create the required folders using your computer's folder creation feature.

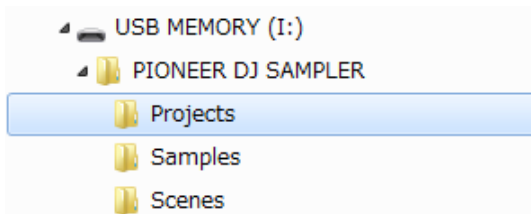

<Windows OS example>

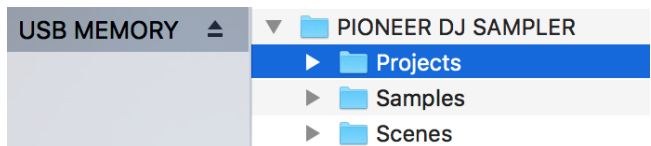

<Mac OS example>

2. When copying is done, disconnect safely from your computer and exit USB MASS STORAGE MODE.
3. Navigate to HOME > PROJECT and select OPEN. Check if the demo projects are available.
4. Please confirm that you can LOAD a demo project and play it.

The demo projects might not playback correctly if the LOOPMASTERS SAMPLE PACK folder is not located in the /PIONEER DJ SAMPLER/Samples directory.